


IXA-3NSN45

IXA-4NSN45

High-Speed Type	Battery-less Absolute	Arm Length: 450 mm	Vertical Axis: 180/330 mm
-----------------	-----------------------	--------------------	---------------------------

Model Specification Items

IXA	-		NSN	45		-		-	T2
Series	-	Number of axes	Type	Arm length	Vertical stroke	-	Cable length	-	Applicable controller
		3 3 axes	NSN High-speed type	45 450mm	18 180mm		N Nil		T2 XSEL-RAX/SAX
		4 4 axes			33 330mm		5L 5m		
							10L 10m		
							<input type="checkbox"/> L Specified length (1m increments)		



Main specifications

Item	Description		
	3-axis specification	4-axis specification	
Max. payload (kg) (Note 1)	10		
Speed (Note 2)	Combined max. speed (mm/s)	8282	
	Max. speed of individual axes	1st arm (deg/s)	610
		2nd arm (deg/s)	800
		Vertical axis (mm/s)	1600
		Rotational axis (deg/s)	— 2000
Push force (N) (Note 3)	Upper limit	110	
	Lower limit	25	
Arm length (mm)	450		
Individual arm length (mm)	1st arm	200	
	2nd arm	250	
Operation range of individual axes	1st arm (deg)	±137	
	2nd arm (deg)	±137	
	Vertical axis (mm)	180/330	
	Rotational axis (deg)	— ±360	

- POINT Selection Notes**
- Please refer to P51 for Notes 1 - 9.
 - The maximum set value for acceleration/deceleration varies depending on the weight of the object being transported, the travel distance, and the location. For continuous operation, either lower the acceleration/deceleration values or refer to the duty (guideline) and set a stop time after acceleration/deceleration.
 - If the motor is replaced, absolute reset must be performed. An adjustment jig will be required to perform an absolute reset on the rotational axis (4th axis). Please refer to P53 for details.
 - A continuous operation cannot be performed for SCARA robots at 100% of speed and acceleration. Refer to the "Acceleration/Deceleration Setting Guidelines" for executable operating conditions.

Item	Description	
	3-axis specification	4-axis specification
Positioning repeatability (Note 4)	Within horizontal surface	±0.01 mm
	Vertical axis	±0.01 mm
Rotational axis	—	±0.005 degrees
	User wiring	10-core (9-core + shield) AWG24 (rated 30V/Max. 1A)
User piping	Outer diameter Ø6, inner diameter Ø4, air tube 3 pcs. (max. usable pressure 0.6MPa)	
Alarm lamp (Note 5)	Amber color LED, small pilot lamp 1 pc. (DC24V supply required)	
Brake release switch (Note 6)	Brake release switch for preventing vertical axis from dropping.	
Tip axis	Allowable torque	3.2 N·m 3.2 N·m
	Allowable load moment	8.3 N·m
Ambient operational temperature and humidity	0-40°C, 20-85% RH or lower (non-condensing)	
Degree of protection	IP20	
Vibration- and impact-resistance	No impact or vibration should be applied.	
Noise (Note 7)	80 dB or lower	
International standard	CE marking, RoHS	
Motor type	AC servo motor	
Motor wattage	1st arm	600W
	2nd arm	400W
	Vertical axis	200W
	Rotational axis	— 100W
Encoder type	Battery-less absolute	
Encoder pulse	131072 pulse/rev	

Option		
Name	Model number	Reference page
Flange	IX-FL-1	53


(Note) Please purchase separately.

Cable length			
Type	Cable code	3-axis specification	4-axis specification
Standard type	5L(5m)	<input type="checkbox"/>	<input type="checkbox"/>
	10L(10m)	<input type="checkbox"/>	<input type="checkbox"/>
	1L(1m) ~ 4L(4m)	<input type="checkbox"/>	<input type="checkbox"/>
Specified length	6L(6m) ~ 9L(9m)	<input type="checkbox"/>	<input type="checkbox"/>
	11L(11m)	<input type="checkbox"/>	<input type="checkbox"/>
	12L(12m)	<input type="checkbox"/>	<input type="checkbox"/>
	13L(13m)	<input type="checkbox"/>	<input type="checkbox"/>
	14L(14m)	<input type="checkbox"/>	<input type="checkbox"/>
	15L(15m)	<input type="checkbox"/>	<input type="checkbox"/>

(Note) Total amount of the following cables:
 [3-axis spec.] Motor cables:3, Encoder cables: 3, Brake cable: 1
 [4-axis spec.] Motor cables:4, Encoder cables: 4, Brake cable: 1


Cycle time	
Item	Time
Standard cycle time	0.26 seconds
Continuous cycle time	0.45 seconds

The standard/continuous cycle time represents the time required when an operation is performed with a cycle operation setting at maximum speed, under the following conditions.
 2kg transport, vertical movement 25mm, horizontal movement 300mm (rough positioning arch motion)
 [Standard cycle time]
 The time required for maximum speed. This is a general guideline for high speed performance.
 Note that continuous operation is not possible under maximum speed operation.
 [Continuous cycle time]
 The cycle time for continuous operation.



Tip shaft allowable load inertia moment	
Number of axes	Tip shaft allowable load inertia moment
3-axis specification	0.12 kg · m ²
4-axis specification	

The 4th axis allowable inertia moment is the allowable inertial moment value for the center of rotation conversion of the 4th axis (rotational axis) of the SCARA robot. Make sure that the offset value from center of the rotation of the 4th axis to the tool center of gravity is within the guideline values listed below. If the tool center of gravity is far from the 4th axis center, it is necessary to reduced speed and acceleration/deceleration appropriately. The overhang distance is limited depending on the payload and operating condition.

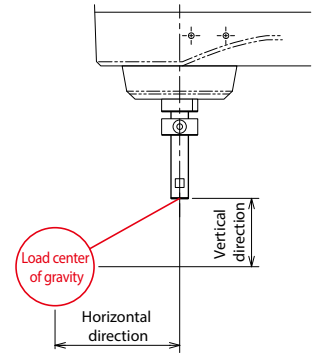



Horizontal direction	Vertical direction
180mm or less	100mm or less

Acceleration/Deceleration Setting Guidelines

The SCARA Robot IXA cannot operate continuously at the maximum acceleration/deceleration or maximum speed specified in the catalog. To operate at the maximum acceleration/deceleration, set a stop time referring to the continuous operation duty guideline graph. If a continuous operation is required, do so within the continuous operation guideline range shown in the acceleration/deceleration setting guideline graph.


- 1) For a PTP operation, always use the WGHT command in the program to set the weight and moment of inertia. For the SCARA robot, the maximum acceleration/deceleration for each payload is set at 100%. When the payload differs, the operation time will also vary even at the same acceleration/deceleration or speed setting.
- 2) Adjust the acceleration/deceleration setting value by gradually increasing it from the continuous operation reference value.
- 3) If an overload error occurs, lower the acceleration/deceleration as required, or set a stop time by referring to the continuous operation duty guideline.
- 4) Duty (%) = (Operation time / (Operation time + Stop time)) x 100
- 5) When moving the robot horizontally at high speed, operate the vertical axis as close to the upward end as possible.
- 6) Set the moment of inertia and payload to the allowable value or lower.
- 7) The load mass represents the moment of inertia and weight at the center of rotation of the 4th axis.
- 8) Operate the robot at an appropriate acceleration/deceleration according to the weight and moment of inertia for the 4-axis specification. Otherwise, the drive section may become prematurely unusable or damaged, or vibration may occur.
- 9) If the load moment of inertia is high, vibration may occur in the vertical axis, depending on the position of the vertical axis. In such a case, decrease the acceleration/deceleration for operation as required.

PTP Operation

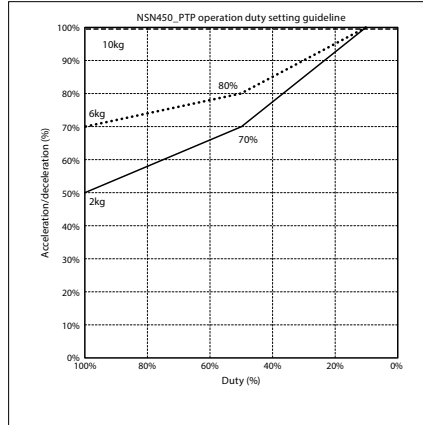
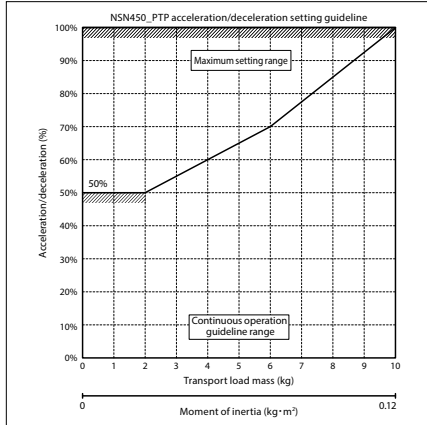


CP Operation



Horizontal

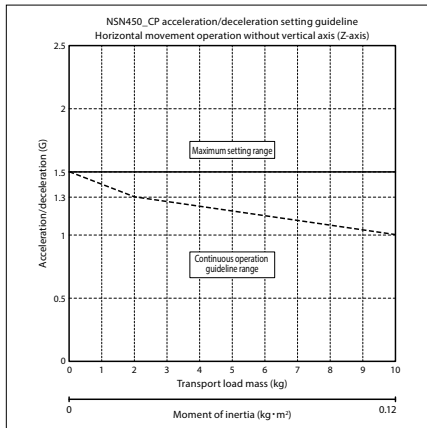

Vertical

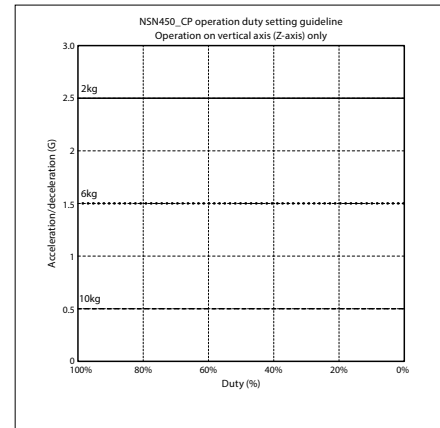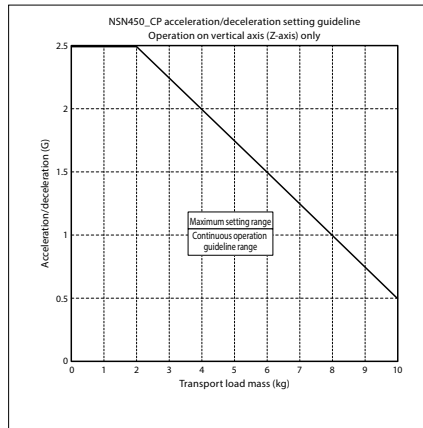

CP operation: Acceleration/deceleration Limitations


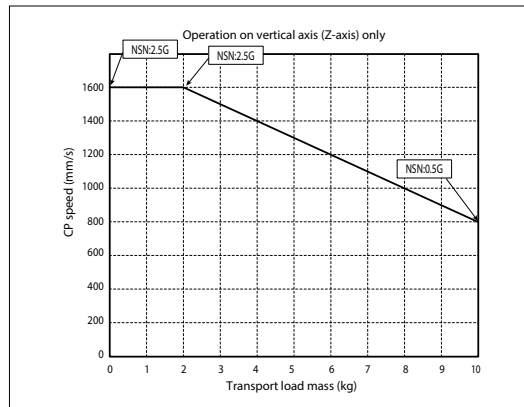
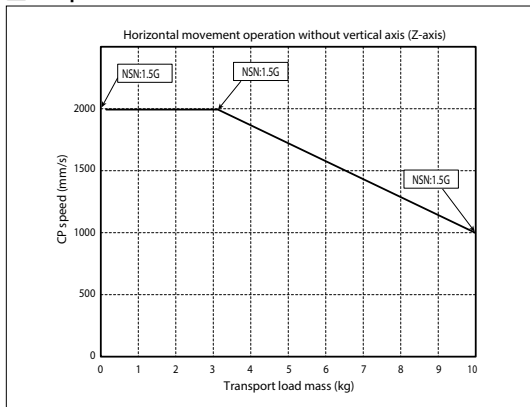


IXA-3NSN4518_4NSN4518











(Note) Refer to P51 (Note 9) for cable connections

S.T.: Stroke
M.E.: Mechanical end
S.E.: Stroke end

D-sub connector for user wiring
(9-pole, socket, fixture M2.6)
Wiring: 24AWG,
10-core (9-core + shield)

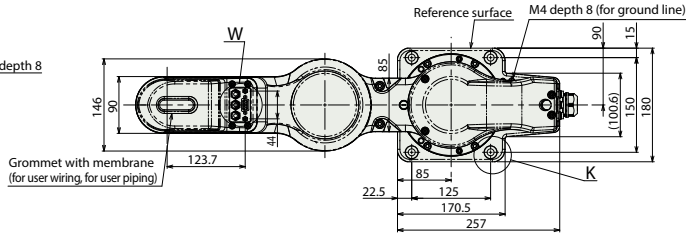

Cross section Y-Y
(4 places)

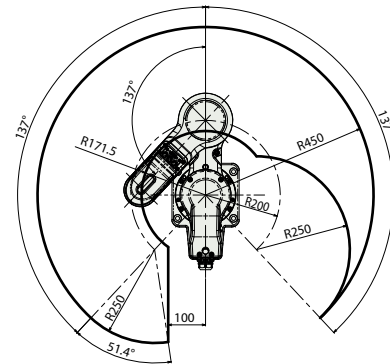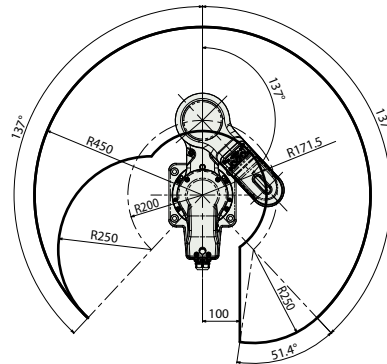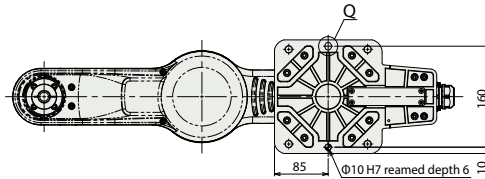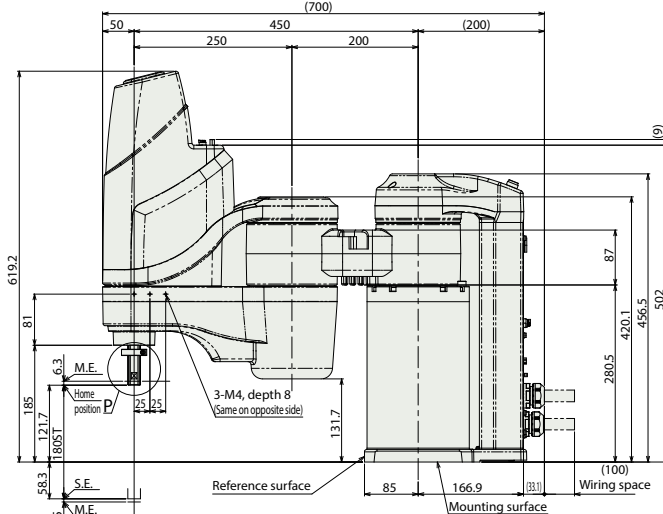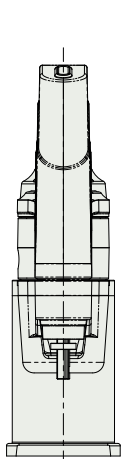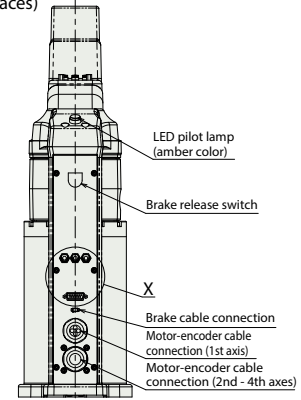


Mass

Item	Description	Mass
Mass	3-axis specification	31.0kg
	4-axis specification	32.5kg


IXA-3NSN4533_4NSN4533

(Note) Refer to P51 (Note 9) for cable connections


D-sub connector for user wiring
(9-pole, socket, fixture M2.6)
Wiring: 24AWG,
10-core (9-core + shield)






Detailed view of W
User panel details

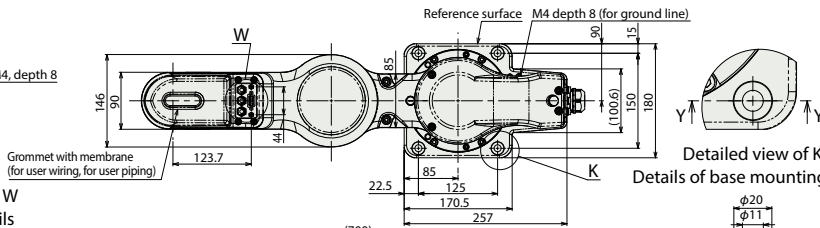


Detailed view of K
Details of base mounting holes




Cross section Y-Y
(4 places)

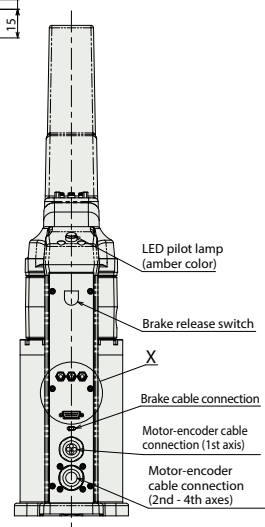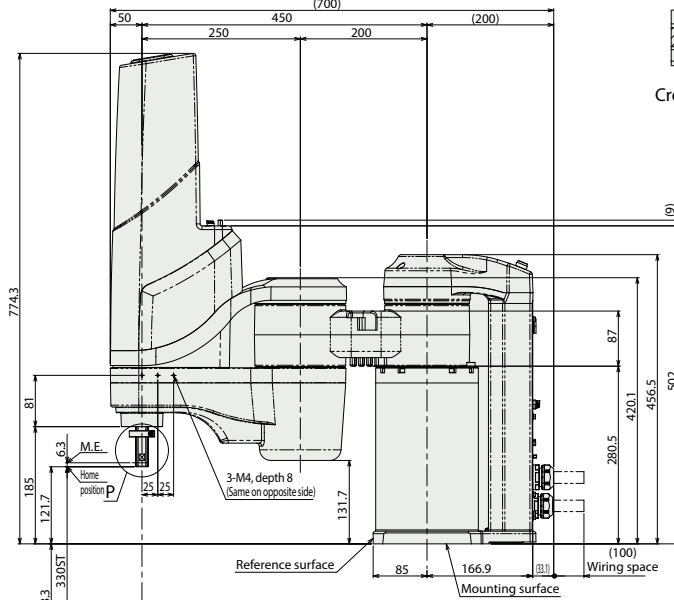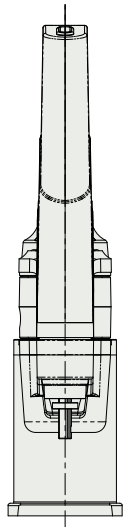


LED pilot lamp
(amber color)
Brake release switch
X
Brake cable connection
Motor-encoder cable connection
(1st axis)
Motor-encoder cable connection
(2nd - 4th axes)




Detailed view of P




Cross section Z-Z

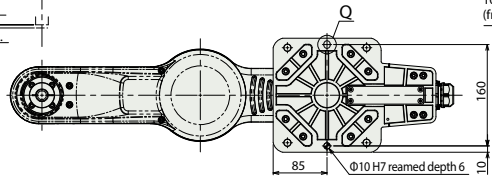


Details of Q
Details of base oblong holes



Detailed view of X
Details of rear panel

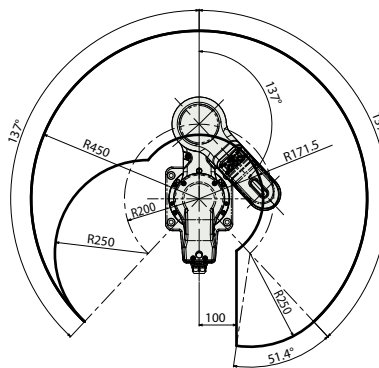

Left arm system operation range

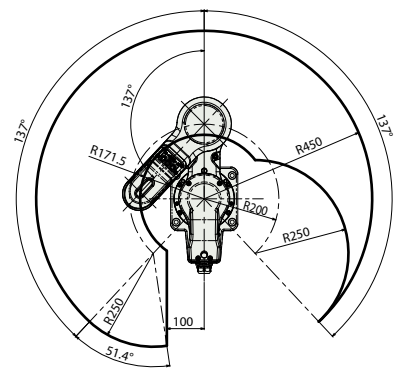

Right arm system operation range

Mass

Item	Description
Mass	3-axis specification 31.5kg
	4-axis specification 33.0kg

Applicable controller

The actuator on this page can be operated by the controller indicated below.

Name	External view	Max. number of connectable axes	Power supply voltage	Control method														Max. number of positioning points	Reference page	
				Positioner	Pulse train	Program	Network* option													
				DV	CC	CIE	PR	CN	ML	ML3	EC	EP	PRT	SSN	ECM					
XSEL-RAX3/SAX3 (for IXA)		3	3-phase AC200V	—	—	●	●	●	—	●	—	—	—	●	●	—	—	—	41250 (Depending on the type)	54
XSEL-RAX4/SAX4 (for IX and IXA)		4		—	—	●	●	●	—	●	—	—	—	—	●	●	—	—	—	36666 (Depending on the type)